


E6 LED Flush-mounted Square Downlight 12W White Light

Barcode: 8433325219123

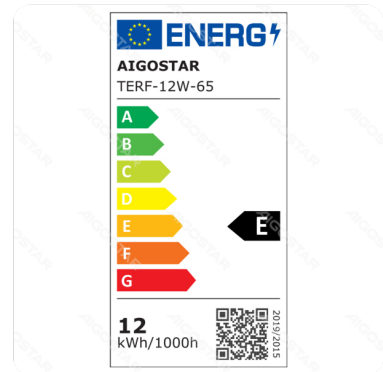

Specification

| | |
|-------------|-------------------|
| Dimension | L175*W175*H26.5mm |
| Wire length | 15mm |
| Cutout size | Φ140-150mm |
| Technology | LED |

Technical parameters

| | |
|-----------------------------------|-------------|
| Voltage | 200-240V~ |
| Luminous flux | 1400lm |
| EEL | E |
| Current | 70mA |
| CRI | Ra≥80 |
| Beam angle | 100° |
| Hg% | < 0.1% |
| Power | 12W |
| Incandescent Lamp Power | 94W |
| Frequency | 50/60Hz |
| Color temperature | 6500K |
| Power consumption per 1,000 hours | 12kwh/1000h |
| IK Protection | IK03 |

Application environment

| | |
|-----------------------|---|
| Environment | Indoor |
| Working Temperature | -20°C ~ 45°C |
| Installation method | Flush-mounted |
| Application of places | sitting room, bedroom, kitchen, restroom, balcony |

Life span

| | |
|---------------------|--------------|
| Life span | 20000H |
| Switching frequency | > 10000times |

Material

| | |
|----------------|----|
| Shell material | PP |
|----------------|----|

Certification

| | |
|---------------|---|
| Certification |   |
|---------------|---|

Package

| | |
|-------------------|--------------|
| Package | pc/color box |
| Outer Package | pcs/ctn |
| Unit package qty | One |
| Outer package qty | 30 |

Certification Download

Instruction
manual

[Download](#)

EEL

[Download](#)