


# LED B5 sipiral

Barcode: 8433325215286

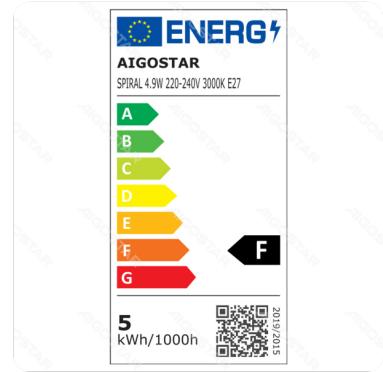

## Specification

|            |            |
|------------|------------|
| Dimension  | D38*H105mm |
| Lampholder | E27        |
| Technology | LED        |

## Technical parameters

|                                   |            |
|-----------------------------------|------------|
| Voltage                           | 220-240V ~ |
| Luminous flux                     | 420lm      |
| EEL                               | F          |
| Current                           | 40mA       |
| CRI                               | Ra≥80      |
| Beam angle                        | 360°       |
| Hg%                               | Zero       |
| Power                             | 4.9W       |
| Incandescent Lamp Power           | 37W        |
| Frequency                         | 50/60Hz    |
| Color temperature                 | 3000K      |
| Power consumption per 1,000 hours | 5kwh/1000h |

## Application environment

|                     |              |
|---------------------|--------------|
| Environment         | Indoor       |
| Working Temperature | -10°C ~ 40°C |

## Life span

|                     |           |
|---------------------|-----------|
| Life span           | 15000h    |
| Switching frequency | 7500times |

## Material

|                |               |
|----------------|---------------|
| Main Materials | Glass&Plastic |
|----------------|---------------|

## Certification

|               |   |
|---------------|---|
| Certification |   |
|---------------|---|

## Package

|                    |                 |
|--------------------|-----------------|
| Package            | pc/blister card |
| Outer Package      | pcs/ctn         |
| M.Package          | pcs/shrink bag  |
| Unit package qty   | One             |
| Middle package qty | Five            |
| Outer package qty  | Fifty           |

## Certification Download

Instruction  
manual

[Download](#)

EEI

[Download](#)