


DOB LED slim street light

Barcode: 8433325213268

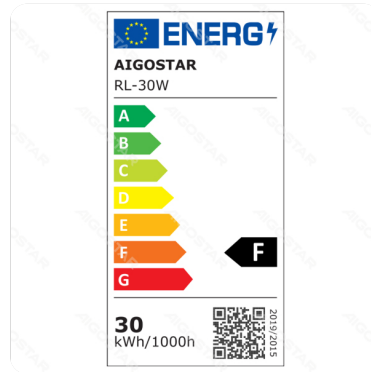

Specification

| | |
|-------------|----------------------|
| Dimension | L129*W88*H439mm |
| Wire length | 300mm |
| Wire | 3x1.0mm ² |
| Technology | LED |

Technical parameters

| | |
|-----------------------------------|-------------|
| Voltage | 220-240V~ |
| Luminous flux | 2550lm |
| EEL | F |
| Current | 130mA |
| CRI | Ra≥80 |
| Beam angle | 110° |
| Power | 30W |
| Incandescent Lamp Power | 30W |
| Frequency | 50/60Hz |
| Color temperature | 6500K |
| Power consumption per 1,000 hours | 30kWh/1000h |
| IK Protection | IK08 |

Application environment

| | |
|---------------------|--------------|
| Environment | Outdoor |
| Working Temperature | -10°C ~ 50°C |

| | |
|---------------------|-----------------|
| Protection | IP65 |
| Installation method | Surface-mounted |

Life span

| | |
|---------------------|--------------|
| Life span | 30000h |
| Switching frequency | ≥100000times |

Material

| | |
|----------------|----------|
| Shell material | Aluminum |
| Main Materials | Aluminum |

Certification

| | |
|---------------|---|
| Certification |  |
|---------------|---|

Package

| | |
|-------------------|--------------|
| Package | pc/color box |
| Outer Package | pcs/ctn |
| Unit package qty | One |
| Outer package qty | 10 |

Certification Download

Instruction
manual

[Download](#)

EEL

[Download](#)