


LED Lamp Beads E14 8W

Barcode: 8433325363338

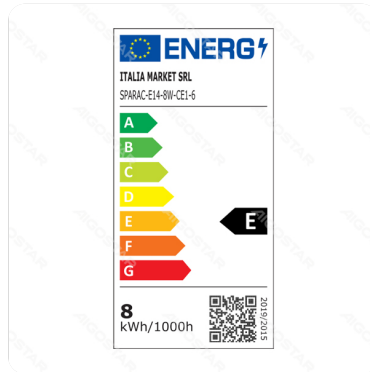

Feature

| | |
|------------|-----|
| Technology | LED |
|------------|-----|

Specification

| | |
|------------|--------------|
| Dimension | D22.5*H65 mm |
| Lampholder | E14 |

Technical parameters

| | |
|-------------------------|----------|
| Voltage | AC/DC12V |
| Luminous flux | 880lm |
| EEL | E |
| Current | 46mA |
| CRI | Ra≥80 |
| Beam angle | 360° |
| Power | 8W |
| Incandescent Lamp Power | 64W |
| Frequency | 50/60Hz |
| Color temperature | 6500K |
| DF | ≥0.5 |

Application environment

| | |
|---------------------|--------------|
| Environment | Indoor |
| Working Temperature | -10°C ~ 40°C |

Life span

| | |
|---------------------|-----------|
| Life span | 15000h |
| Switching frequency | 7500times |

Material

| | |
|----------------|------------|
| Shell material | Ceramic&PC |
| Main Materials | Ceramic&PC |

Certification

| | |
|---------------|---|
| Certification |  |
|---------------|---|

Package

| | |
|--------------------|-----------------|
| Package | pc/blister card |
| Outer Package | pcs/ctn |
| M.Package | pcs/shrink bag |
| Unit package qty | 1 |
| Middle package qty | 10 |
| Outer package qty | 100 |

Internal parameter

| | |
|-----------------------------------|------------|
| Power consumption per 1,000 hours | 8kWh/1000h |
|-----------------------------------|------------|

Certification Download

EEI

[Download](#)