


LED dimming filament G45 E14 4W 2200K

Barcode: 8433325370930

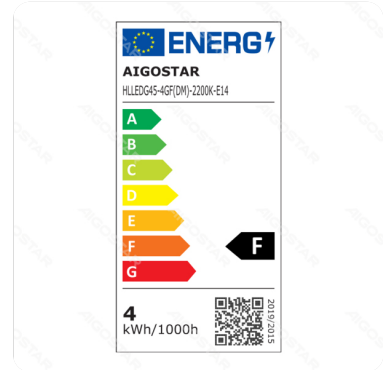

Feature

| | |
|------------|-----|
| Technology | LED |
|------------|-----|

Specification

| | |
|------------|-----------|
| Dimension | D45*H82mm |
| Lampholder | E14 |

Technical parameters

| | |
|-------------------------|-----------|
| Voltage | 220-240V~ |
| Luminous flux | 400lm |
| EEL | F |
| Current | 26mA |
| CRI | Ra≥80 |
| Beam angle | 360° |
| Power | 4W |
| Incandescent Lamp Power | 38W |
| Frequency | 50/60Hz |
| Color temperature | 2200K |
| DF | ≤0.5 |

Application environment

| | |
|---------------------|--------------|
| Working Temperature | -20°C ~ 40°C |
|---------------------|--------------|

Life span

| | |
|---------------------|------------|
| Life span | 15000h |
| Switching frequency | >7500times |

Material

| | |
|----------------|-------|
| Shell material | Glass |
| Main Materials | Glass |

Certification

| | |
|---------------|---|
| Certification |  |
|---------------|---|

Package

| | |
|--------------------|----------------|
| Package | pc/color box |
| Outer Package | pcs/ctn |
| M.Package | pcs/shrink bag |
| Unit package qty | 1 |
| Middle package qty | Five |
| Outer package qty | 100 |

Internal parameter

| | |
|-----------------------------------|------------|
| Power consumption per 1,000 hours | 4kwh/1000h |
|-----------------------------------|------------|

Certification Download

EEI

[Download](#)