


# Tri-proof light

Barcode: 8433325295752

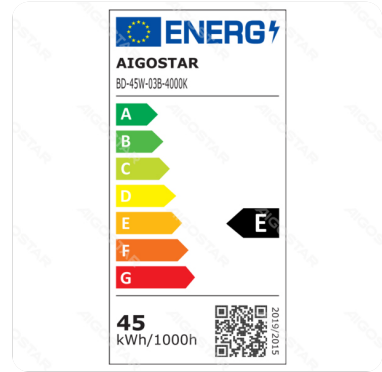

## Specification

|            |                 |
|------------|-----------------|
| Dimension  | L1500*W46*H34mm |
| Technology | LED             |

## Technical parameters

|                                   |             |
|-----------------------------------|-------------|
| Voltage                           | 200-240V ~  |
| Luminous flux                     | 5400lm      |
| EEL                               | E           |
| Current                           | 200mA       |
| CRI                               | Ra≥80       |
| Beam angle                        | 120°        |
| Hg%                               | Zero        |
| Power                             | 45W         |
| Frequency                         | 50/60Hz     |
| Color temperature                 | 4000K       |
| Power consumption per 1,000 hours | 45kwh/1000h |

## Application environment

|                     |              |
|---------------------|--------------|
| Environment         | Indoor       |
| Working Temperature | -20°C ~ 40°C |
| Protection          | IP65         |

## Life span

|           |        |
|-----------|--------|
| Life span | 30000h |
|-----------|--------|

|                     |            |
|---------------------|------------|
| Switching frequency | 12500times |
|---------------------|------------|

## Material

|                |    |
|----------------|----|
| Main Materials | PC |
|----------------|----|

## Certification

|               |   |
|---------------|---|
| Certification |   |
|---------------|---|

## Package

|                   |              |
|-------------------|--------------|
| Package           | pc/color box |
| Outer Package     | pcs/ctn      |
| Unit package qty  | One          |
| Outer package qty | 30           |

## Certification Download

EEI

[Download](#)